

Specification

Small Form Factor

Duplex LC Receptacle – SFF

Optical Transceivers

1000BASE-SX

1250Mbit/s



Ordering Information

TSP - F_xCH1 - C11



Voltage/ Temperature

1: 3.3V / +0 ~ +70°C

2: 3.3V / -40 ~ +85°C

Model Name	Voltage	Category	Device type	Interface	SD/LOS	Temperature	Distance
TSP-F1CH1-C11	3.3V	W/O DDMI	VCSEL / PIN	AC / AC Coupling	LVTTTL	+0 ~ +70°C	550m
TSP-F2CH1-C11						-40 ~ +85°C	(Table 1)

Media	Wavelength	Fiber Core Dimension	Bandwidth	Fiber Type	Distance
Multi-Mode Fiber	850nm	50 μ m	500 MHz*km	OM2	550m
		50 μ m	400 MHz*km		500m
		62.5 μ m	200 MHz*km	OM1	275m
		62.5 μ m	160 MHz*km		220m

Table 1

Features

- ROHS Compliant
- Standard Small Form Factor Package – SFF MSA Compliant
- Gigabit Ethernet Standard (IEEE802.3Z 1000BASE-SX) Compliant
- Fibre Channel Standard (100-M5-SN-I and 100-M6-SN-I) Compliant
- Laser Class 1 Product –IEC/EN 60825-1 Compliant
- Standard Duplex LC Receptacle Optical Interface
- Single + 3.3 V Power Supply
- Differential LVPECL Data Input and Output
- LVTTTL Signal Detect
- Low Power Consumption

Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit
Storage temperature	T _s	-40	--	85	°C
Supply voltage	VCC	0	--	4	V
Operating Relative Humidity	RH	5	--	95	%
Input voltage	V _{IN}	0	--	VCC	V

Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	3.1	3.3	3.5	V
Operating Case temperature (TSP-F1CH1-C11)	Top	0	--	70	°C
Operating Case temperature (TSP-F2CH1-C11)		-40	--	85	
TCurrent	Icc	--	--	250	mA
Soldering Temperature (10sec)	Tsold	--	--	260	°C


Transmitter Specifications (Vcc =3.1 ~ 3.5V ; Top = 0~ 70°C / Top = -40~ 85°C)

Parameter	Symbol	Min	Typ	Max	Unit
Optical Characteristics					
Output Optical Power	P _o	-9	--	-3	dBm
Extinction Ratio	ER	9	--	--	dB
Center Wavelength	λ	830	--	860	nm
Spectral Width (RMS)	σλ	--	--	0.85	nm
Rise/Fall time (20-80%)	T _r / T _f	--	--	260	ps
Relative Intensity Noise	RIN	--	--	-117	dB/Hz
Output Eye	Compliant with IEEE 802.3z				
Max. P _{out} TX-DISABLE Asserted	POFF	--	--	-45	dBm
Electrical Characteristics					
Differential Input Voltage	V _{DIFF}	0.4	--	2.0	V
Tx_Disable_Input_High	V _{DISH}	2.0	--	V _{cc} +0.3	V
Tx_Disable_Input_Low	V _{DISL}	0	--	0.8	V

Receiver Specifications (Vcc =3.1 ~ 3.5V ; Top = 0 ~ 70°C / Top = -40 ~ 85°C)

Parameter	Symbol	Min	Typ	Max	Unit
Optical Characteristics					
Optical Input Power-maximum	Pmax	0	--	--	dBm
Receiver Sensitivity (PRBS=2 ⁷ -1 ; BER ≤ 10 ⁻¹²)	Sens	--	--	-18	dBm
Operating Center Wavelength	λ	770	--	860	nm
Signal Detect – Asserted	PSA	--	--	-18	dBm
Signal Detect – De-asserted	PSD	-35	--	--	dBm
Signal Detect – Hysteresis	PSH	0.5	--	6	dB
Electrical Characteristics					
Differential Output Voltage	V _{DIFF}	0.4	--	2.0	V
Signal Detect Output Voltage - Low	V _{SDL}	0	--	0.8	V
Signal Detect Output Voltage - High	V _{SDH}	2.0	--	V _{cc} +0.3	V


Pin Definition and Descriptions

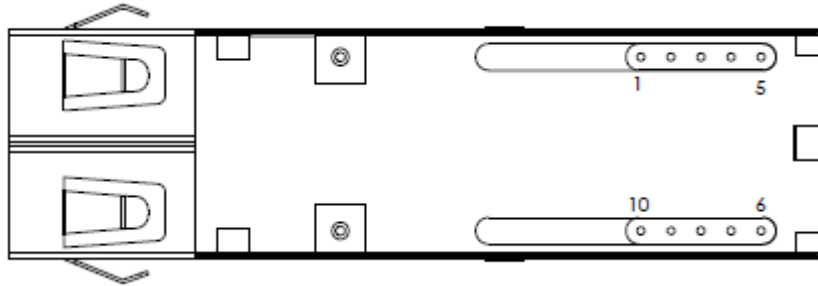


Bottom View

Pin	Name	Input-Output /Level	Description	Ref.
1	VEER	Input	Receiver ground	
2	VCCR	Input	Receiver power supply	
3	SD	Output/LVTTL	Receiver signal detect. High signal indicates optical signal is present at receiver input.	
4	RD-	Output/LVPECL	Inverted receiver data output	
5	RD+	Output/LVPECL	Non-inverted receiver data output	
6	VCCT	Input	Transmitter power supply	
7	VEET	Input	Transmitter ground	
8	DIS	Input/LVTTL	Transmitter Disable Control	
9	TD+	Input/LVPECL	Transmitter non-inverted data input	
10	TD-	Input/LVPECL	Transmitter inverted data input	

Recommended Circuit Diagram

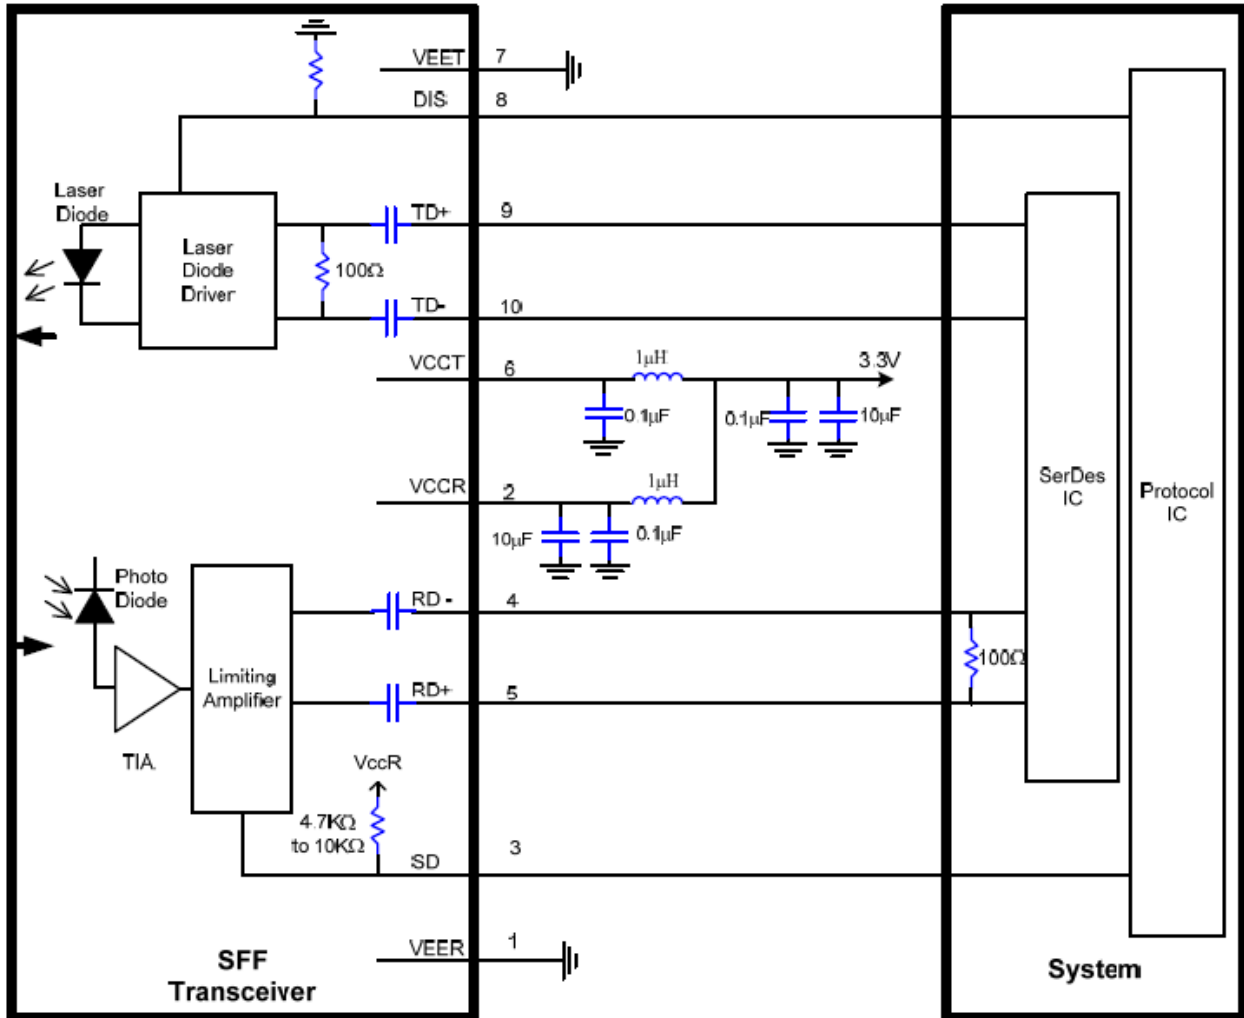

Mechanical Outlines (Unit : mm)

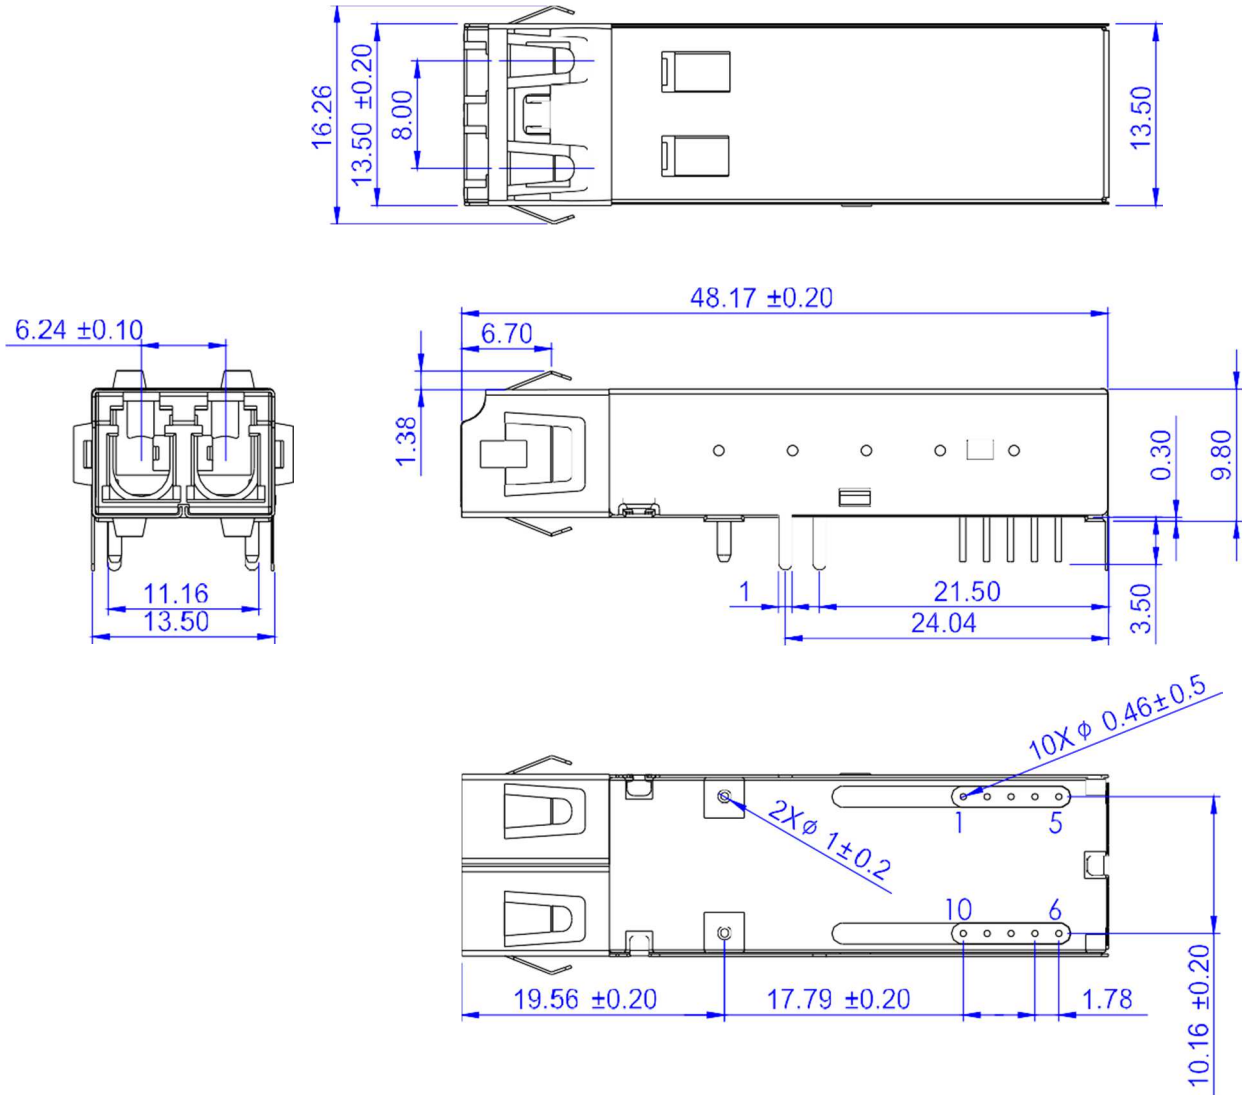

ESD

Normal ESD precautions are required during the handling of this module. This transceiver is shipped in ESD protective packaging. It should be removed from the packaging and handled only in an ESD protected environment.



Contact Information

Formerica OptoElectronics Inc.

5F-11, No.38, Taiyuan St., Zhubei City,
Hsinchu County 30265, Taiwan

Tel: +886-3-5600286

Fax: +886-3-5600239

San Diego, CA

Tel: 1-949-466-8069

inquiry@formericaoe.com

www.formericaoe.com