

Specification

1x9 Form Factor

Duplex ST Receptacle

Optical Transceivers

1000BASE

1250Mbit/s



Ordering Information

TSP—D_xCK6—L2T



Voltage / Temperature

1 : 3.3V / +0 ~ +70°C

2 : 3.3V / -40 ~ +85°C

Model Name	Voltage	Device type	Interface	SD/LOS	Temperature	Distance
TSP-D1CK6-L2T	3.3V	DFB / PIN	DC / DC Coupling	PECL	+0 ~ +70°C	50km
TSP-D2CK6-L2T					-40 ~ +85°C	

Features

- **Differential LVPECL Inputs & Outputs**
- **Single 3.3V Power Supply**
- **LVPECL Signal Detection Output**
- **Industry Standard 1x9 Package**

Applications

- **Switch to Switch Interface**
- **Gigabit Ethernet**
- **1X Fiber Channel**

Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit
Storage Temperature	Ts	-40		85	°C
Power Supply Voltage	Vcc	0		6	V
Soldering Temperature (10 seconds on leads only)	Tsold	--		260	°C
Input Voltage	Vin	GND		Vcc	V
Output Current	Iout	0		30	mA

Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	3.15	3.3	3.45	V
Operating Case temperature (TSP-D1CK6-L2T)	Top	0	--	70	°C
Operating Case temperature (TSP-D2CK6-L2T)		-40	--	85	
Data Rate		--	1250	--	Mbps
Power Supply Current	Icc	--	--	250	mA

Transmitter Specifications (V_{CC} = 3.15 ~ 3.45V ; Top = 0 ~ 70°C / Top = -40 ~ 85°C)

Parameter	Symbol	Min	Typ	Max	Unit
Optical Characteristics					
Optical Transmit Power	Po	-5	--	0	dBm
Optical Center Wavelength	λ	1530	1550	1570	nm
Output Spectrum Width (-20dB)	σλ	--	--	1	nm
Extinction Ratio	ER	8.2	--	--	dB
Optical Rise Time	Tr	--	--	0.26	ns
Optical Fall Time	Tf	--	--	0.26	ns
Relative Intensity Noise	RIN	--	--	-116	dB/Hz
Output Eye	Compliant with IEEE 802.3z				
Electrical Characteristics					
Data Input Current – Low		-350	--	--	μA
Data Input Current – High		--	--	350	μA
Differential Input Voltage	V _{IH} -V _{IL}	300	--	2400	mV


Receiver Specifications ($V_{CC} = 3.15 \sim 3.45V$; $T_{op} = 0 \sim 70^{\circ}C$ / $T_{op} = -40 \sim 85^{\circ}C$)

Parameter	Symbol	Min	Typ	Max	Unit
Optical Characteristics					
Sensitivity	Sen	--	--	-24	dBm
Saturation Power (PRBS=2 ⁷ -1 ; BER ≤ 10 ⁻¹²)	PMAX	-3	--	--	dBm
Operating Center Wavelength	λ	1100	--	1600	nm
Signal Detect – Asserted	PSA	--	--	-24	dBm
Signal Detect – De-asserted	PSD	-35	--	--	dBm
Signal Detect - Hysteresis	PSH	1	--	5	dB
Electrical Characteristics					
Data Output Voltage – Low	VIL –VCC	-1830	--	-1555	mV
Data Output Voltage – High	VIH –VCC	-1085	--	-880	mV
Signal Detect Output Voltage-- Low	VSDL –VCC	-2.0	--	-1.58	V
Signal Detect Output Voltage-- High	VSDH –VCC	-1.1	--	-0.74	V

Pin Definition and Descriptions


1 Receiver Signal Ground	
2 Receiver Data Out	O N.C.
3 Receiver Data Out Bar	
4 Signal Detect	
5 Receiver Power Supply	Top View
6 Transmitter Power Supply	
7 Transmitter Data In Bar	
8 Transmitter Data In	O N.C.
9 Transmitter Signal Ground	

Recommended Circuit Diagram

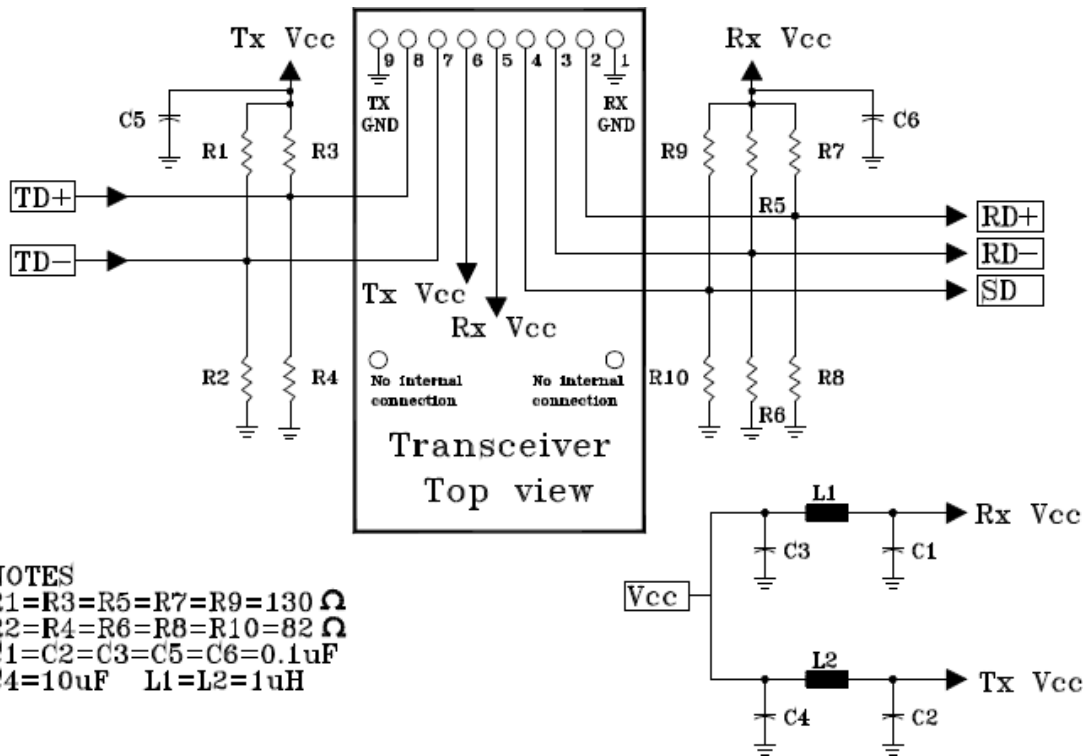

NOTES
 R1=R3=R5=R7=R9=130 Ω
 R2=R4=R6=R8=R10=82 Ω
 C1=C2=C3=C5=C6=0.1uF
 C4=10uF L1=L2=1uH

Mechanical Outlines (Unit : mm)

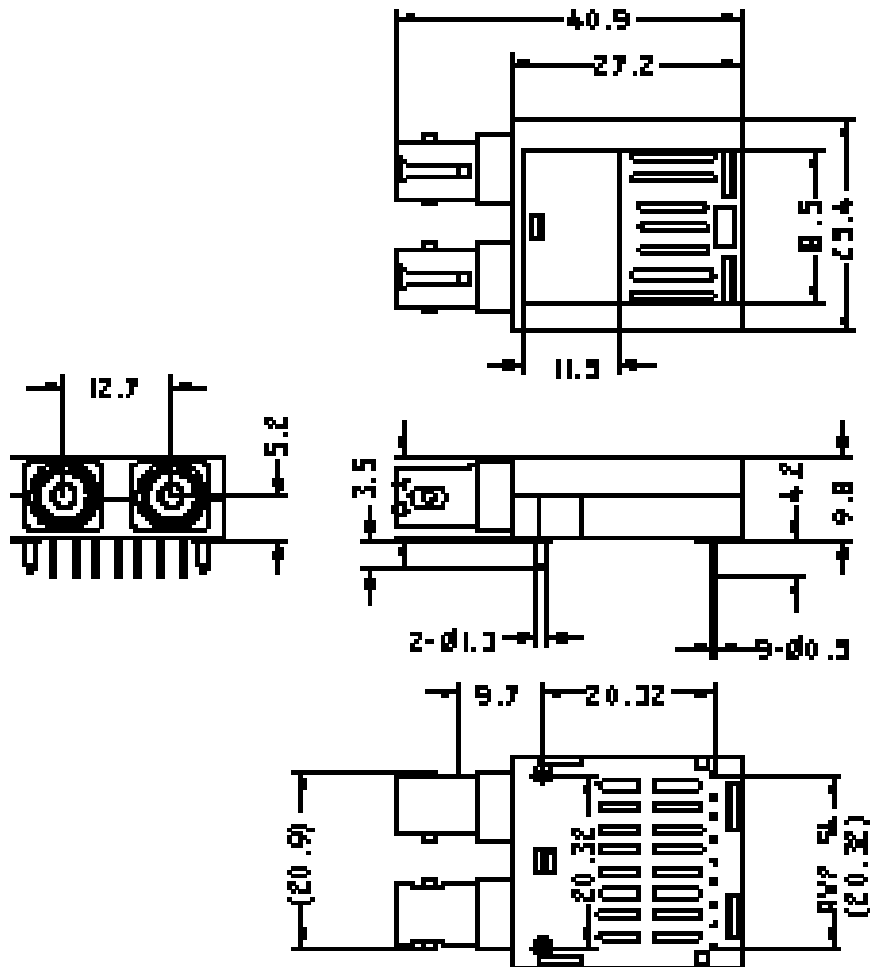



ESD

Normal ESD precautions are required during the handling of this module. This transceiver is shipped in ESD protective packaging. It should be removed from the packaging and handled only in an ESD protected environment.

Contact Information

Formerica OptoElectronics Inc.

5F-11, No.38, Taiyuan St., Zhubei City,

Hsinchu County 30265, Taiwan

Tel: +886-3-5600286

Fax: +886-3-5600239

San Diego, CA

Tel: 1-949-466-8069

inquiry@formericaoe.com

www.formericaoe.com